

# EL60ASC, EL60ASCF







## MOTOR OPERATED EXTERNAL VENETIAN BLIND “CLICK” 60 MM SLATS WITH CLIP-ON SIDE GUIDING CHANNELS

EL60ASC : beaded 60 mm slats

EL60ASCF : flexible 60 mm slats

### Description



- Easy to mount “CLICK” blind pre-installed in customised natural anodised or powder coated aluminium pelmet
- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats 45° open
- Roll formed coil coated 60 mm slats of partly recycled aluminium
- Natural anodised or powder coated extruded aluminium bottom rail 60 x 19 mm
- Extruded side guiding channels 81 x 25 mm with groove in similar finish and black insert for noise reduction
- Black bottom rail end caps, lift tape and Aramid reinforced polyester ladder cords
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

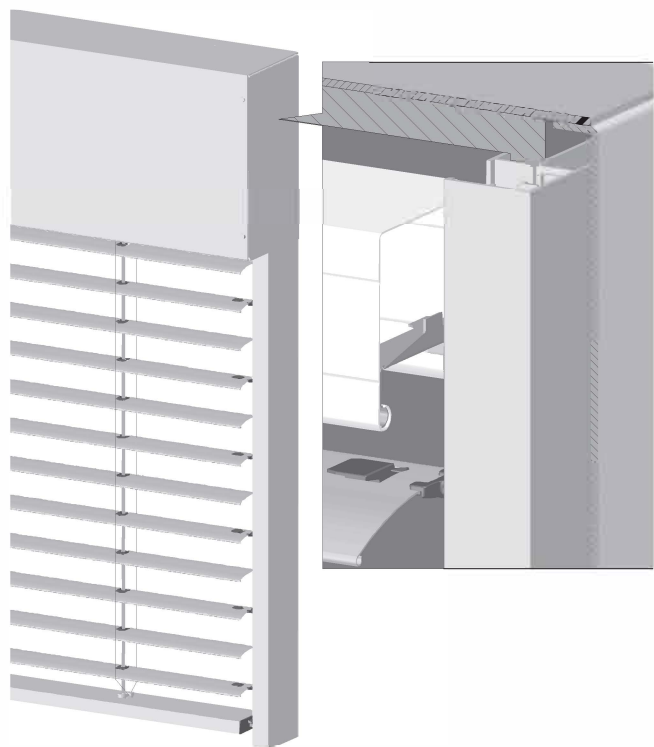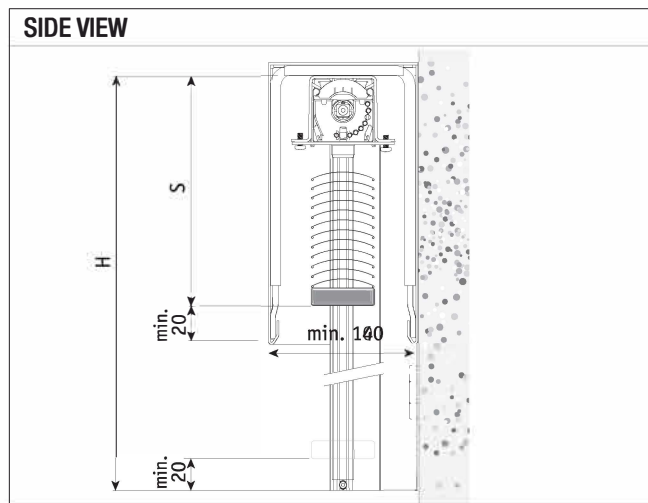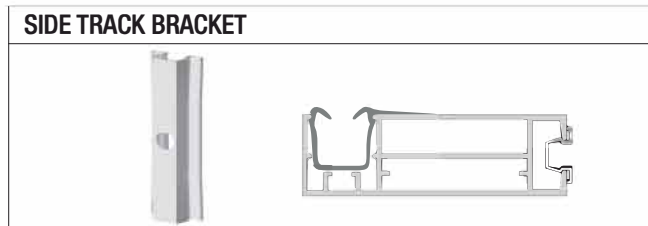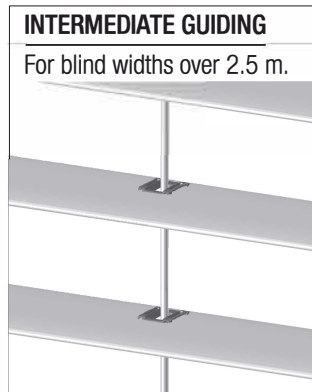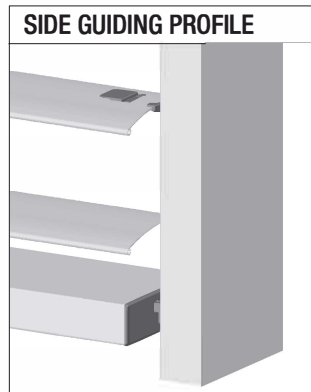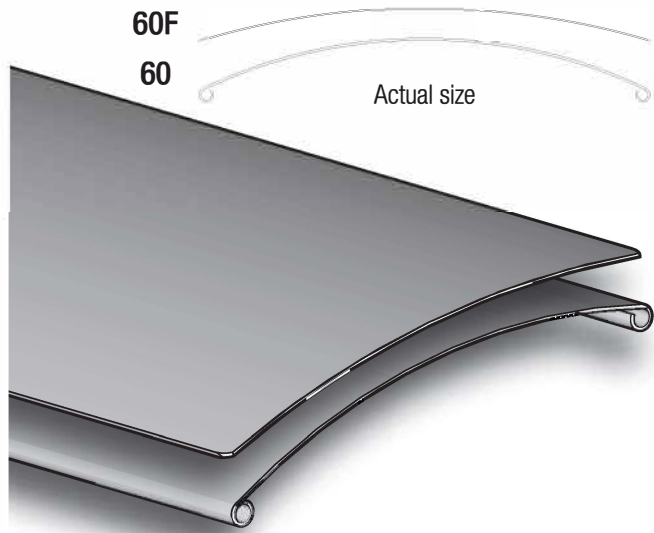

	Width		Height max. (cm)	Surface max. (m <sup>2</sup> )
	min. (cm)	max. (cm)		
EL 60 ASC	78	350	400	12
EL 60 ASCF	78	350	400	12

STACKING HEIGHT (MM) (intermediate blind heights on page 85)					
Blind height H	Stacking height S 60ASC	Stacking height S 60ASCF	Blind height H	Stacking height S 60ASC	Stacking height S 60ASCF
1000	193	152	3000	350	235
1500	232	174	3500	390	252
2000	270	195	4000	430	266
2500	307	215			

# OPTIONS EL60ASC, EL60ASCF

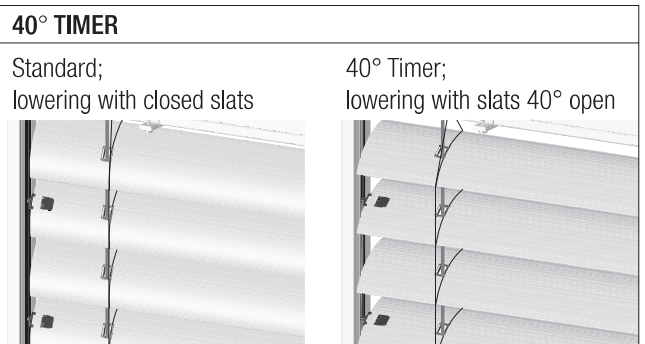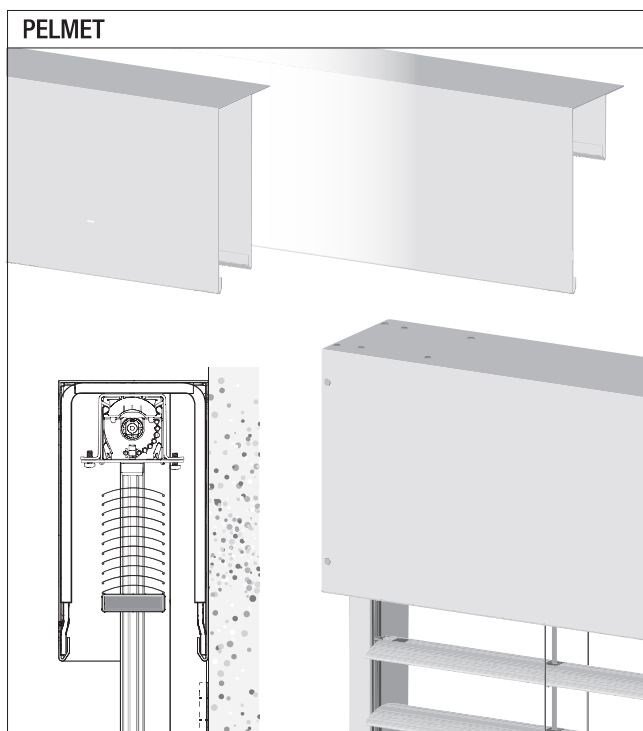

- FURTHER OPTIONS** (Additional information on page 81)
- Dual Light Control
  - Slow motion motor for more precise slat tilting
  - Perforated slats
  - Additional guiding cable(s)
  - For possible motor controls see separately available documentation