


EL88ASC

MOTOR OPERATED EXTERNAL VENETIAN BLIND "CLICK" 88 MM SLATS WITH CLIP-ON SIDE GUIDING CHANNELS

EL88ASC: Z-shaped beaded 88 mm slats with seal

Description


- Easy to mount "CLICK" blind pre-installed in customised natural anodised or powder coated aluminium pelmet
- Roll formed zinc-plated steel U-shaped head rail 57 x 51 mm
- Thermally protected 230 V motor, dust and splash waterproof according to IP54
- Positive tilting mechanism to prevent slat movement by wind
- Lowering with slats closed, raising with slats open
- Roll formed coil coated 88 mm slats of partly recycled aluminium
- Beaded slat with inserted black seal to reduce contact noise and light leakage
- Natural anodised or powder coated extruded aluminium bottom rail 90 x 24 mm, alternatively heavy-duty 90 x 45 mm for blinds over 1,800 mm width
- Extruded side guiding channels 81 x 25 mm with groove in similar finish and black insert for noise reduction
- Black bottom rail end caps and lift tape
- Grey ball tape for good stacking of the slats
- UV and weather resistant components of mixed composition
- Wind stable as further determined by size and controls

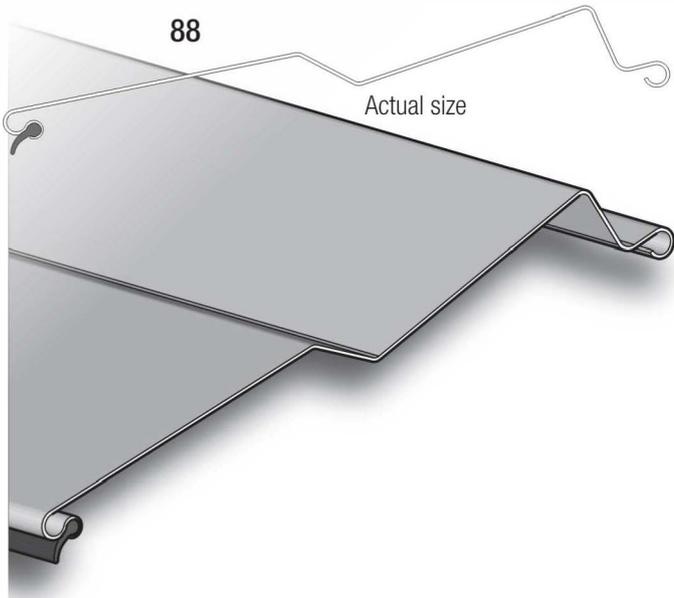



SIDE GUIDING PROFILE



SIDE TRACK BRACKET

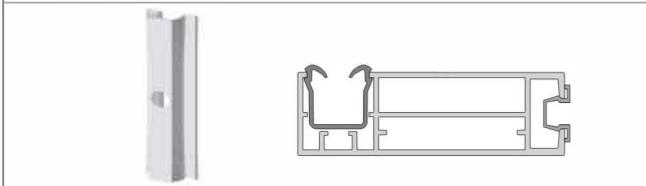

SIDE VIEW

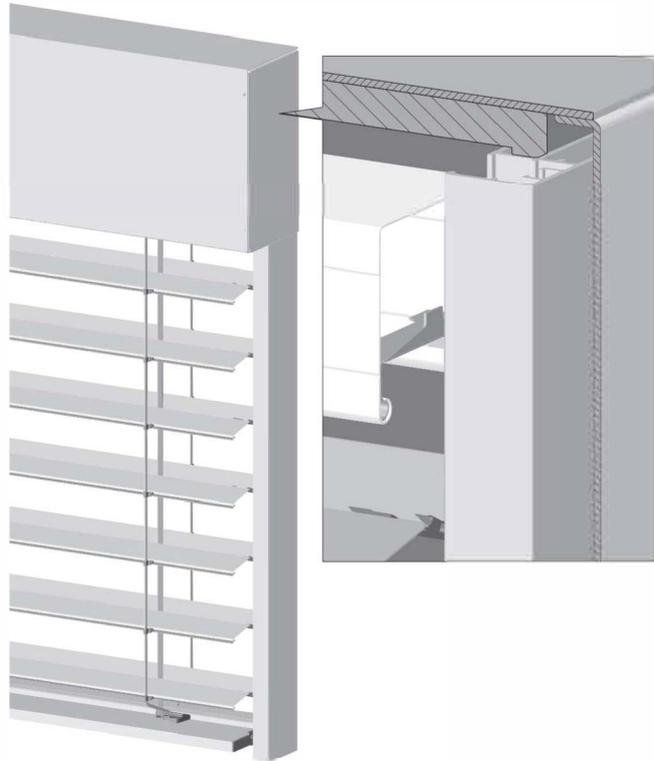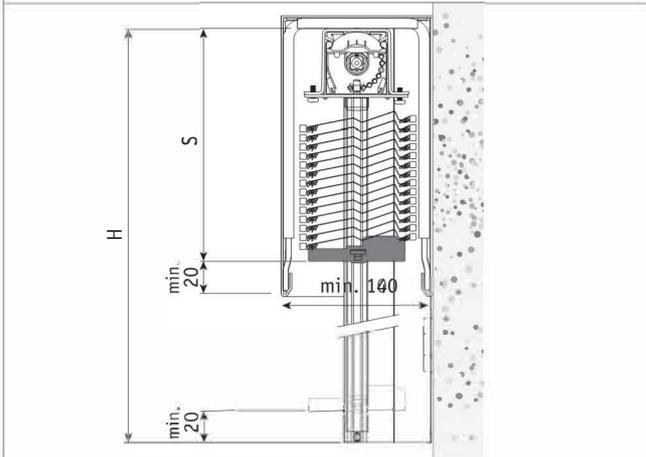



SIZE LIMITATIONS

	Width		Height max. (cm)	Surface max. (m ²)
	min. (cm)	max. (cm)		
EL 88 ASC	78	350	400	12

STACKING HEIGHT (MM) (intermediate blind heights on page 85)

Blind height H	Stacking height 88ASC	Blind height H	Stacking height 88ASC
1000	180	3000	310
1500	200	3500	345
2000	240	4000	380
2500	275		

OPTIONS EL88ASC

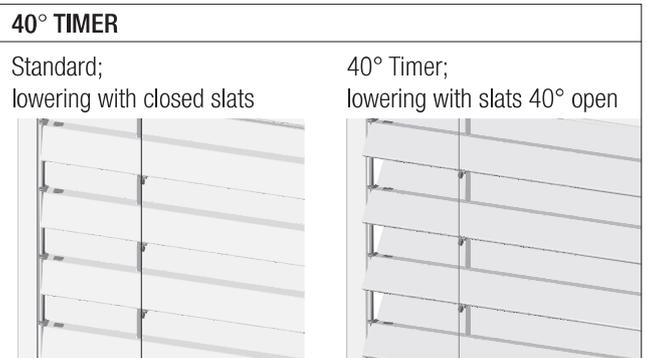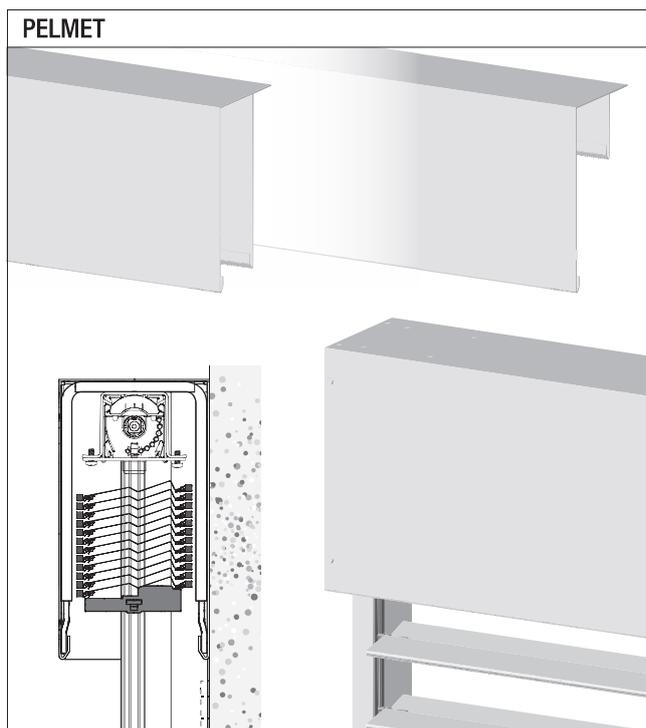

- FURTHER OPTIONS** (Additional information on page 81)
- Dual Light Control
 - Slow motion motor for more precise slat tilting
 - Perforated slats
 - For possible motor controls see separately available documentation